

EEC 130A: Homework 7

Due: 3:30 pm, Feb. 26th, 2015

1. (FAE P4.48) With reference to Fig. 1, find \mathbf{E}_1 if $\epsilon_1 = 2\epsilon_0$, $\epsilon_2 = 18\epsilon_0$, $\mathbf{E}_2 = \hat{x}3 - \hat{y}2 + \hat{z}2$ (V/m), and the boundary has a surface charge density $\rho_s = 3.54 \times 10^{-11}$ (C/m²). What angle does \mathbf{E}_2 make with the z-axis. (Hint: Read through Example 4-10 in the textbook.)

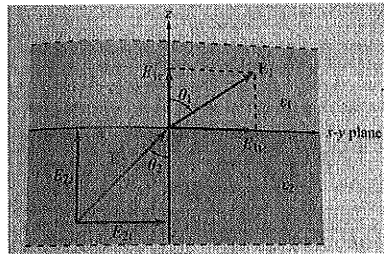


Figure 1: (FAE Fig. 4.19) Application of boundary conditions at the interface between two dielectric media (Example 4-10).

2. (FAE P4.52) Determine the force of attraction in a parallel-plate capacitor with $A = 5$ cm², $d = 2$ cm, and $\epsilon_r = 4$ if the voltage across it is 50 V. (Hint: Read through Section 4-10 in the textbook.)
3. (FAE P4.56) Fig. 2-(a) depicts a capacitor consisting of two parallel, conducting plates separated by a distance d . The space between the plates contains two adjacent dielectrics, one with permittivity ϵ_1 and surface area A_1 and another with ϵ_2 and A_2 . The objective of this problem is to show that the capacitance C of the configuration shown in Fig. 2-(a) is equivalent to two capacitance in parallel, as illustrated in Fig. 2-(b), with

$$C = C_1 + C_2, \quad (1)$$

where

$$C_1 = \frac{\epsilon_1 A_1}{d},$$

$$C_2 = \frac{\epsilon_2 A_2}{d}.$$

To this end, proceed as follows:

- (a) Find the electric field \mathbf{E}_1 and \mathbf{E}_2 in the two dielectric layers.
- (b) Calculate the energy stored in each section and use the result to calculate C_1 and C_2 .

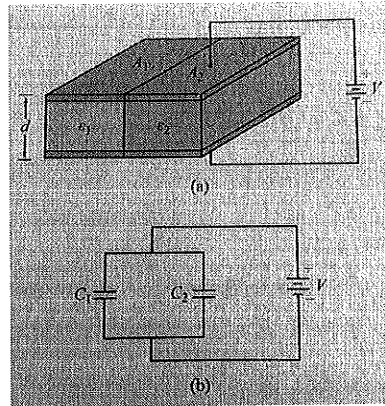


Figure 2: (FAE Fig. P4.56) (a) Capacitor with parallel dielectric section, and (b) equivalent circuit.

(c) Use the total energy stored in the capacitor to obtain an expression for C . Show that (1) is indeed valid.

4. (FAE P4.54) An electron with charge $Q_e = -1.6 \times 10^{-19}$ C and mass $m_e = 9.1 \times 10^{-31}$ kg is injected at a point adjacent to the negatively charged plate in the region between the plates of an air-filled parallel-plate capacitor with separation of 1 cm and rectangular plates each 10 cm^2 in area (Fig. 3). If the voltage across the capacitor is 10 V, find the following:

- (a) The force acting on the electron.
- (b) The acceleration of the electron.
- (c) The time it takes the electron to reach the positively charged plate, assuming that it starts from rest.

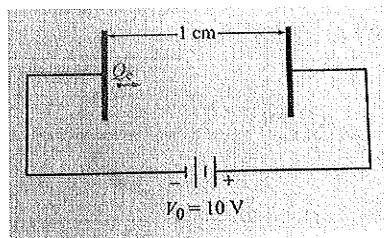


Figure 3: (FAE Fig. P4.54) Electron between charged plates of Problem 3.