

9.9 • A bicycle wheel has an initial angular velocity of 1.50 rad/s .
 (a) If its angular acceleration is constant and equal to 0.300 rad/s^2 , what is its angular velocity at $t = 2.50 \text{ s}$? (b) Through what angle has the wheel turned between $t = 0$ and $t = 2.50 \text{ s}$?

9.10 • An electric fan is turned off, and its angular velocity decreases uniformly from 500 rev/min to 200 rev/min in 4.00 s .
 (a) Find the angular acceleration in rev/s^2 and the number of revolutions made by the motor in the 4.00-s interval. (b) How many more seconds are required for the fan to come to rest if the angular acceleration remains constant at the value calculated in part (a)?


9.16 • At $t = 0$ a grinding wheel has an angular velocity of 24.0 rad/s . It has a constant angular acceleration of 30.0 rad/s^2 until a circuit breaker trips at $t = 2.00 \text{ s}$. From then on, it turns through 432 rad as it coasts to a stop at constant angular acceleration.
 (a) Through what total angle did the wheel turn between $t = 0$ and the time it stopped? (b) At what time did it stop? (c) What was its acceleration as it slowed down?

9.39 • A uniform sphere with mass 28.0 kg and radius 0.380 m is rotating at constant angular velocity about a stationary axis that lies along a diameter of the sphere. If the kinetic energy of the sphere is 176 J , what is the tangential velocity of a point on the rim of the sphere?

9.45 • Energy is to be stored in a 70.0-kg flywheel in the shape of a uniform solid disk with radius $R = 1.20 \text{ m}$. To prevent structural failure of the flywheel, the maximum allowed radial acceleration of a point on its rim is 3500 m/s^2 . What is the maximum kinetic energy that can be stored in the flywheel?

9.84 • The pulley in Fig. P9.84 has radius 0.160 m and moment of inertia $0.560 \text{ kg}\cdot\text{m}^2$. The rope does not slip on the pulley rim. Use energy methods to calculate the speed of the 4.00-kg block just before it strikes the floor.


Figure P9.84



9.95 • You hang a thin hoop with radius R over a nail at the rim of the hoop. You displace it to the side (within the plane of the hoop) through an angle β from its equilibrium position and


11.8 • A 60.0-cm , uniform, 50.0-N shelf is supported horizontally by two vertical wires attached to the sloping ceiling (Fig. E11.8). A very small 25.0-N tool is placed on the shelf midway between the points where the wires are attached to it. Find the tension in each wire. Begin by making a free-body diagram of the shelf.

Figure E11.8



11.12 • A uniform aluminum beam 9.00 m long, weighing 300 N , rests symmetrically on two supports 5.00 m apart (Fig. E11.12). A boy weighing 600 N starts at point A and walks toward the right.
 (a) In the same diagram construct two graphs showing the upward forces F_A and F_B exerted on the beam at points A and B , as functions of the coordinate x of the boy. Let $1 \text{ cm} = 100 \text{ N}$ vertically, and $1 \text{ cm} = 1.00 \text{ m}$ horizontally. (b) From your diagram, how far beyond point B can the boy walk before the beam tips? (c) How far


Figure E11.12



from the right end of the beam should support B be placed so that the boy can walk just to the end of the beam without causing it to tip?


11.13 • Find the tension T in each cable and the magnitude and direction of the force exerted on the strut by the pivot in each of the arrangements in Fig. E11.13. In each case let w be the weight of the suspended crate full of priceless art objects. The strut is uniform and also has weight w . Start each case with a free-body diagram of the strut.

Figure E11.13

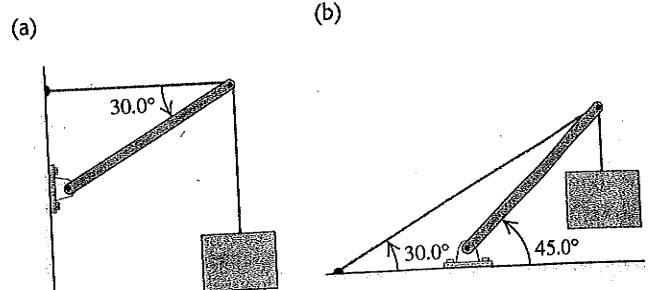

11.18 • A $15,000\text{-N}$ crane pivots around a friction-free axle at its base and is supported by a cable making a 25° angle with the crane (Fig. E11.18). The crane is 16 m long and is not uniform, its center of gravity being 7.0 m from the axle as measured along the crane. The cable is attached 3.0 m from the upper end of the crane. When the crane is raised to 55° above the horizontal holding an


Figure E11.18



$11,000\text{-N}$ pallet of bricks by a 2.2-m , very light cord, find (a) the tension in the cable and (b) the horizontal and vertical components of the force that the axle exerts on the crane. Start with a free-body diagram of the crane.

11.70 • One end of a uniform meter stick is placed against a vertical wall (Fig. P11.70). The other end is held by a light-weight cord that makes an angle θ with the stick. The coefficient of static friction between the end of the meter stick and the wall is 0.40 .
 (a) What is the maximum value the angle θ can have if the stick is to remain in equilibrium? (b) Let the angle θ be 15° . A block of the same weight as the meter stick is suspended from the stick, as shown, at a distance x from the wall. What is the minimum value of x for which the stick will remain in equilibrium? (c) When

Figure P11.70



5/1 A torque applied to a flywheel causes it to accelerate uniformly from a speed of 300 rev/min to a speed of 900 rev/min in 6 seconds . Determine the number of revolutions N through which the wheel turns during this interval. (Suggestion: Use revolutions and minutes for units in your calculations.)

Ans. $N = 60 \text{ rev}$

5/3 The angular velocity of a gear is controlled according to $\omega = 12 - 3t^2$ where ω , in radians per second, is positive in the clockwise sense and where t is the time in seconds. Find the net angular displacement $\Delta\theta$ from the time $t = 0$ to $t = 3 \text{ s}$. Also find the total number of revolutions N through which the gear turns during the 3 seconds .

Ans. $\Delta\theta = 9 \text{ rad}$, $N = 3.66 \text{ rev}$